


PANEL LIFT SERVICES

Panel lifting is a method of raising and securing the workstations during a re-carpet project when carpet tile is being reinstalled. Lifting the panels is a cost saving alternative to fully disassembling and reassembling the modular furniture. This option significantly reduces the amount of labor and time necessary to complete the project. All Furniture Commercial services has been performing panel lifts for over 16 years, we have developed a process using our own custom designed equipment that makes this a cost effective alternative to disassembly.

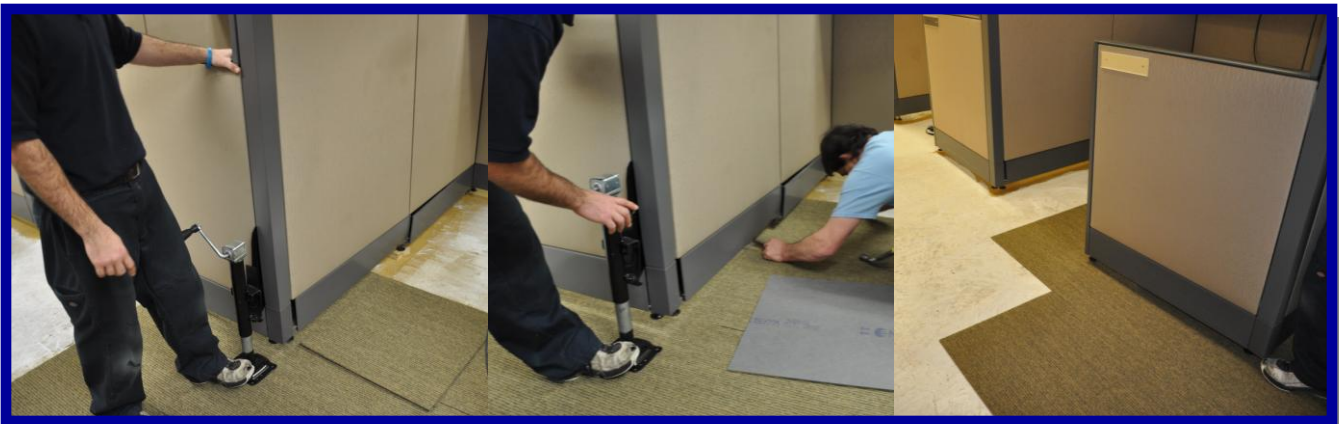

Panel Lift Process

- **Prior to the start of the project any furniture and files to be moved are labeled.**
- **Pedestal units and standing files are removed from the workstations.**
- **Surfaces and overheads attached to the panel frames remain in place and will be lifted.**
- **Any necessary disassembly of the furniture is completed.**
- **Electricity is disconnected at the base feed to eliminate any risk of a short circuit.**
- **Using our specially designed lifting tools, we lift and secure the workstations.**
- **Carpet is removed throughout the area around and under the workstations.**
- **Floor preparation is completed and adhesive is applied by the flooring contractor.**
- **We then work alongside the flooring contractor resetting the furniture during installation.**
- **All files, pedestal units and free standing furniture are then returned and installed.**
- **Power is reconnected and electrical outlets are checked for any power or voltage changes.**
- **All areas are then cleaned and made ready for immediate use.**

Contact us for additional information or to schedule a quote by calling 612-238-3200.